


T2063.

**Punto is designed to support medium traffic.** It is perfect for installing on roads with an ADT of 1.000-20.000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles.

- Made from spheroidal graphite ductile cast iron, according to ISO 1083 (Type 500-7) and standard EN 1563.
- Compliant with the European standard UNE EN-124.
- Ball and socket joint to guarantee easy opening and safety in operation.
- 90° safety locking and maximum aperture angle of 115°.
- Sound-proof joint included.
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.

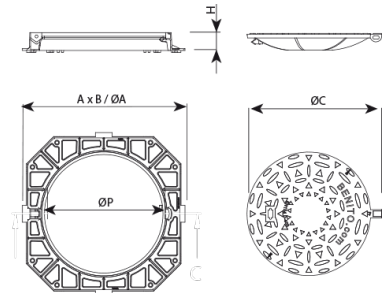

| REF.    |     | ØA  | B   | H   | ØC  | ØP  | UN. |
|---------|-----|-----|-----|-----|-----|-----|-----|
| T2063.  | SGS | 800 | -   | 100 | 625 | 602 | 12  |
| T2063K. | SGS | 825 | 825 | 100 | 625 | 600 | 12  |

[Project sheet](#) | [CAD](#) | [HD image](#)