




Pole made of S-235-JR hot-dip galvanised steel available in two formats: *Height up to 8 m for TOP mounting of the luminaire with Ø60 mm; *10 and 12 m cylindrical ones are only and exclusively designed for the installation of circular floodlights with outer equipment (can be housed in the 3 service doors available)

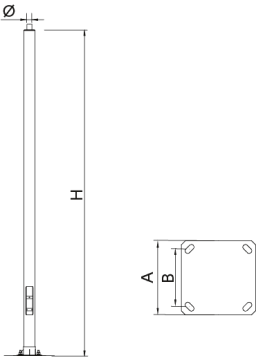

-	H	Ø	A	B	
CILINDRICA 40	4000	60	300	200	M18X500
CILINDRICA 50	5000	60	300	200	M18X500
CILINDRICA 70	7000	60	400	300	M22X500
CILINDRICA 80	8000	60	400	300	M22X500

[Project sheet](#) | [CAD](#) | [Catalogue](#) | [HD image](#)

